


Quebis

electric

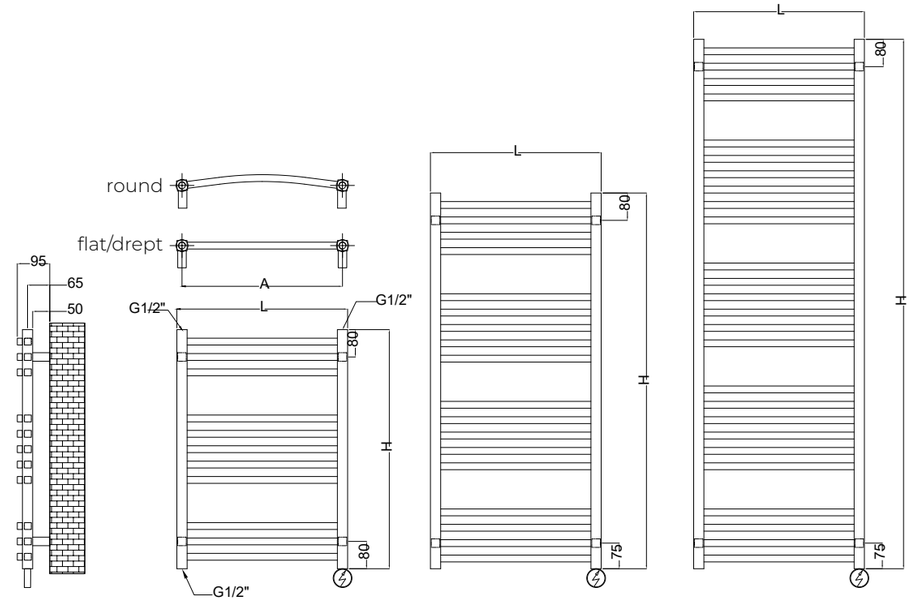

Height Înălțime (H)	Length Lățime (L)	No el Nr elemenți	Weight Greutate	Electric options
mm	mm	pcs	kg	watt
700	500	11	9	300
1100	500	18	14	400
1550	500	26	20	600

RAL/VOPSIT

CHROME/CROMAT

Features and Specifications/
Caracteristici și Specificații

OPTION 05 - NEX features three timer modes **(TURBO, START-STOP, and DELAYED START) for temperature control between 30°C and 60°C**.
It includes a rotating controller, anti-freeze function, overheat and dry operation protection. The intelligent microprocessor system optimizes energy consumption in standby mode.

OPTION 05 - NEX oferă trei tipuri de **temporizatoare (TURBO, START-STOP și DELAYED START) pentru gestionarea temperaturii între 30°C și 60°C.**
Dispune de control rotativ, funcție anti-îngheț, protecție la supraîncălzire și funcționare fără lichid. Sistemul inteligent cu microprocesor optimizează consumul de energie în standby.



Recommended electric heater/Rezistență electrică recomandată – OPTION 05-NEX
See pag. 233 / Detalii la pag. 233

Nominal voltage/
Tensiune nominală: 230V~

Nominal frequency/
Frecvență nominală: 50Hz

Mounting kit included/
Kit montaj inclus: K06/26

Ingress protection/
Grad de protecție: IPX5

Protection class/
Clasa de protecție I

Elements&collectors/
Elemenți și colectori: 20x20+30X30 mm